





EasyX^{lift}



R300WBA

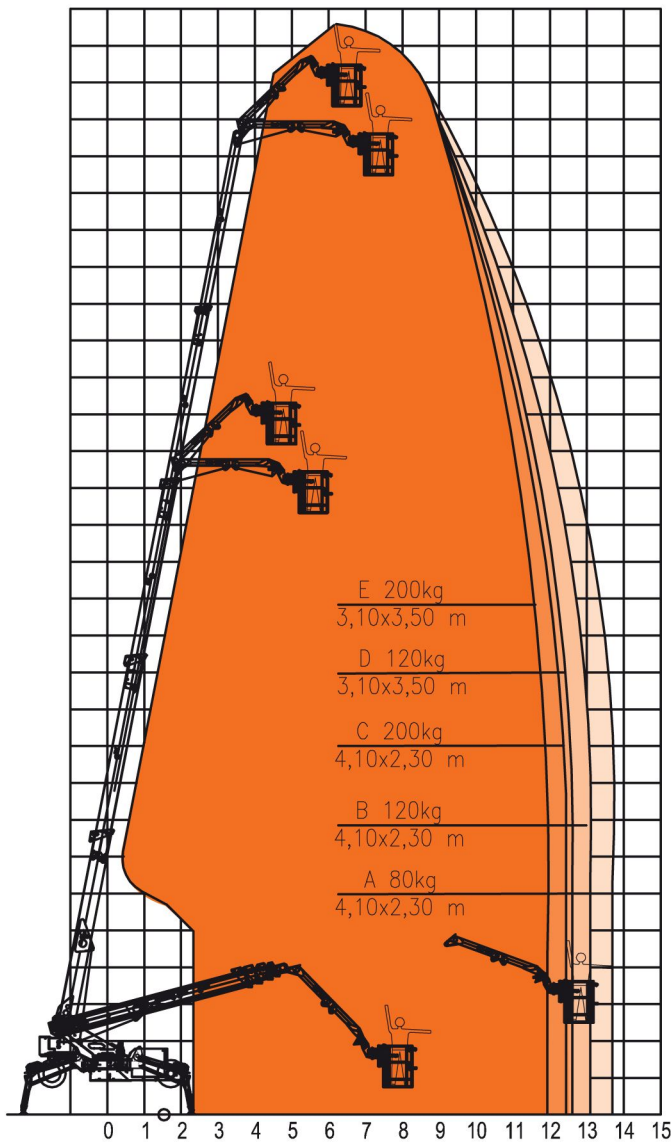

30
29
28
27
26
25
24
23
22
21
20
19
18
17
16
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0

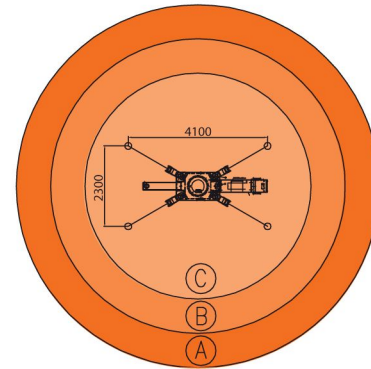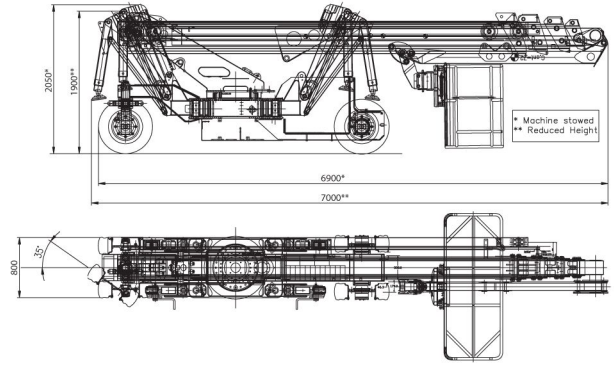

Altezza massima di lavoro	Max. working height	Hauteur max de travail	Altura max de trabajo	Maksimum çalışma yüksekliği	29,20 m
Sbraccio massimo di lavoro	Max. working outreach	Déport max de travail	Alcance max de trabajo	Maksimum çalışma uzaklığı	13,00 m
Rotazione torretta	Turret rotation	Rotation tourelle	Rotación torreta	Göbek dönüş rotasyonu	360° N.C.
Portata massima	Max load capacity	Portée max	Capacidad de carga	Maksimum kaldırma kapasitesi	200 Kg
Comandi elettro-idraulici (Danfoss)	Electro-hydraulic controls (Danfoss)	Commandes électro-hydrauliques (Danfoss)	Mandos electrohidráulicos (Danfoss)	Elektro hidrolik kontrolleri	
Massa totale	Total weight	Poids total	Peso total	Toplam ağırlık	6000 Kg
Pendenza superabile	Gradeability	Max pente admissible	Pendiente máx	Tırmanma kabiliyeti	30%
Dimensioni cesto	Cage dimensions	Dimensions panier	Dimensiones cesta	Platform ölçüleri	2,0 x 0,8 m
Rotazione cesto	Cage rotation	Rotation panier	Rotación cesta	Platform döndürme	90° + 90°

Dati e descrizioni sono forniti a titolo indicativo e non impegnativo

Data and descriptions are approximate and not binding

Toutes les données et descriptions sont fournies à titre indicatif, sans engagement

Los datos y las descripciones son suministrados indicativamente y sin compromiso

Veri ve açıklamalar yaklaşık olarak verilmiştir



Via Leonardo da Vinci, 14
 42041 BRESCELLO (RE) - Italy
 Tel. +39 0522 967620
 Fax +39 0522 961873 - info@easy-lift.it

TERA MÜMESSİLİK İÇ VE DIŞ TİCARET LTD. ŞTİ.
 Serifali Mah. Turgut Özal Bulvarı
 No.169 K.2 Merid Plaza 34775
 Ümraniye / İstanbul - TÜRKİYE
 T: +90 (216) 508 18 00
 F: +90 (216) 508 10 71
 info@teramak.com.tr
 www.teramak.com.tr