

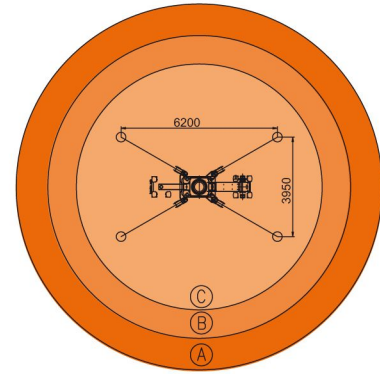



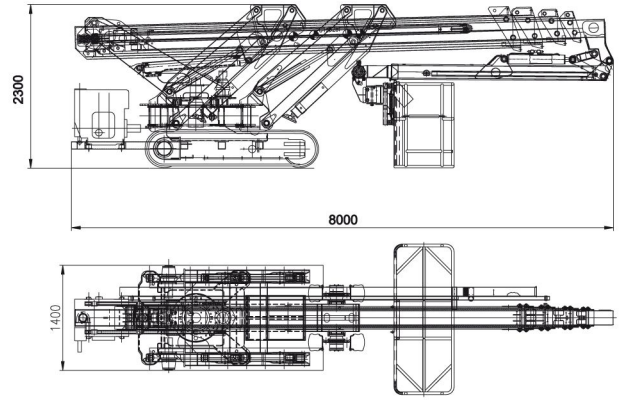

R 420

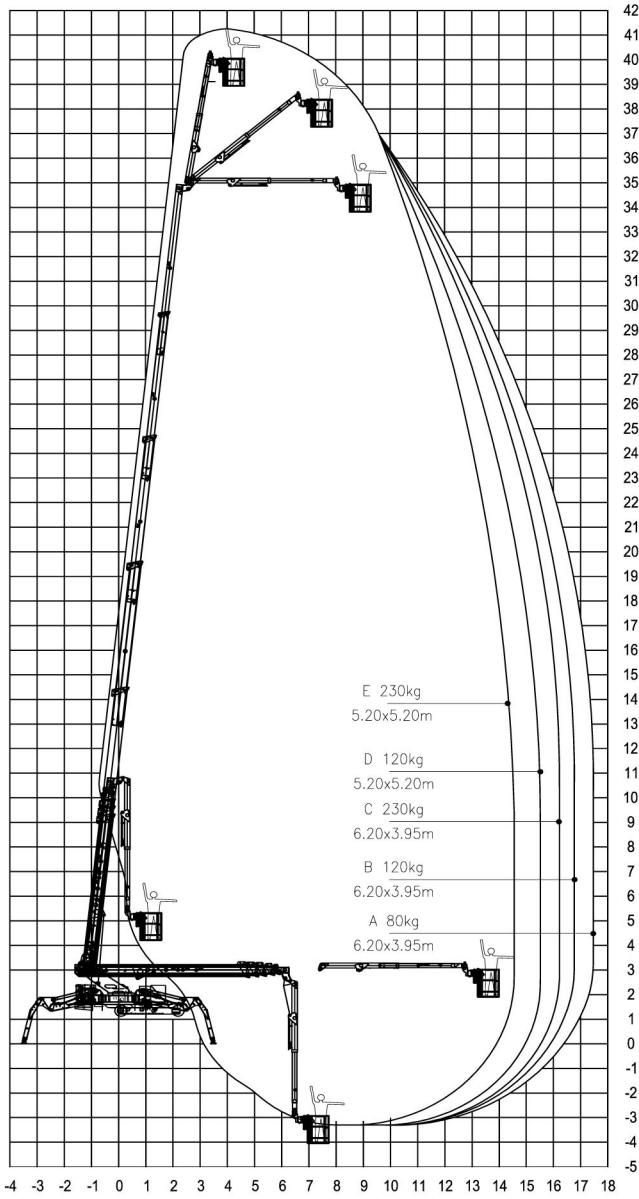

Altezza massima di lavoro Max. working height	Hauteur max de travail	Altura max de trabajo	Maksimum çalışma yüksekliği	41,20 m
Sbraccio massimo di lavoro Max. working outreach	Déport max de travail	Alcance max de trabajo	Maksimum çalışma uzaklığı	17,00 m
Rotazione torretta Turret rotation	Rotation tourelle	Rotación torreta	Göbek dönüş rotasyonu	360° N.C.
Portata massima Max load capacity	Portée max	Capacidad de carga	Maksimum kaldırma kapasitesi	230 Kg
Comandi elettro-idraulici (Danfoss)	Electro-hydraulic controls (Danfoss)	Commandes électro-hydrauliques (Danfoss)	Mandos electrohidráulicos (Danfoss)	Elektro hidrolik kontrolleri
Massa totale Total weight	Poids total	Peso total	Toplam ağırlık	7500 Kg
Pendenza superabile Gradeability	Max pente admissible	Pendiente máx	Tırmanma kabiliyeti	40%
Dimensioni cesto Cage dimensions	Dimensions panier	Dimensiones cesta	Platform ölçüleri	2,0 x 0,8 m
Rotazione cesto Cage rotation	Rotation panier	Rotación cesta	Platform döndürme	90° + 90°

Dati e descrizioni sono forniti a titolo indicativo e non impegnativo

Data and descriptions are approximate and not binding

Toutes les données et descriptions sont fournies à titre indicatif, sans engagement

Los datos y las descripciones son suministrados indicativamente y sin compromiso

Veri ve açıklamalar yaklaşık olarak verilmiştir



Via Leonardo da Vinci, 14
42041 BRESCELLO (RE) - Italy
Tel. +39 0522 967620
Fax +39 0522 961873 - info@easy-lift.it



TERA MÜMESSİLİK İÇ VE
DİŞ TİCARET LTD. ŞTİ.
Serifali Mah. Turgut Özal Bulvarı
No.169 K.2 Merd Plaza 34775
Ümraniye / İstanbul - TÜRKİYE
T: +90 (216) 508 18 00
F: +90 (216) 508 10 71
info@teramak.com.tr
www.teramak.com.tr